

C C-AIRE[®]

COMPRESSORS

A075D120-1230

INCLUDES:

BALL VALVE	✓
TANK DRAIN	✓
OIL DRAIN TUBE	✓
FULL SYNTHETIC OIL	✓
LARGE DISPLACEMENT 3 CYL. PUMPS	✓
LARGE OIL SIGHT GLASS	✓
LIQUID FILLED GAUGE	✓
SIMPLE CONTROL PANEL WITH STARTERS AND ALTERNATOR	✓



FP UNITS (PICTURED)
INCLUDE AFTER COOLER,
AUTO TANK DRAIN
AND INSTALL KIT

*EXTEND YOUR
WARRANTY TO
THREE YEARS
(Part# AX-W95)



SUITABLE FOR:



4-6 PERSON
BODY SHOP



8-10 PERSON
AUTO REPAIR
SHOP



SMALL
MANUFACTURING
PLANT





TRUCK REPAIR
OR TIRE SHOP



SPECS:

PUMP	HP	(2) 7.5
	STAGE	2
	CFM @175 PSI	48 TOTAL
	PUMP	3 CYLINDER CAST IRON
	PUMP RPM	649
	MAIN BEARINGS	50,000 HOUR
MOTOR	OIL	FULL SYNTHETIC
	VOLTS	230 1PH OR 230/460 3PH
	AMPS	33.3@208v, 31.3@230v 1PH
	MOTOR RPM	1760
TANK SIZE		120 GALLON
DIMENSIONS		76"x41"x53"
SHIPPING WEIGHT		1250

*Two Warranty Kits required on Duplex units



'C' The Advantage

WWW.C-AIREINC.COM
800.762.2247 // 651.462.3440
380 WEST 1ST STREET, DRESSER, WI 54009




*Upgrade option

A075D120-1230FP

*FULLY PACKAGED

FULLY PACKAGED UPGRADE OPTION INCLUDES:


- **OVERSIZED AFTER COOLERS**
 - Remove Over 60% of Water Vapor, Humidity or Moisture
- **ENERGY SAVING PNEUMATIC AUTOMATIC TANK DRAIN**
 - Drains Condensate With Zero Air Loss Every Time the Compressor Shuts Off
 - Prevents Valves From Fouling and Reduces Corrosion
- **INCLUDES INSTALLATION KIT**
 - 4 Mounting Pads
 - 4 Anchor Bolts
 - 12" Steel Braided Flex Hose

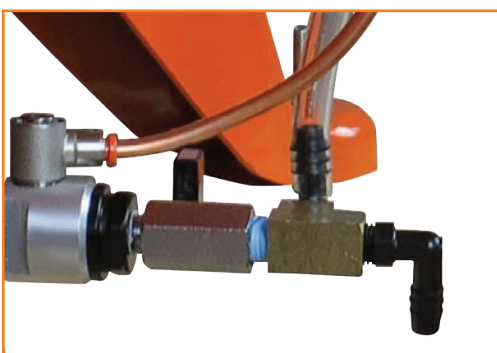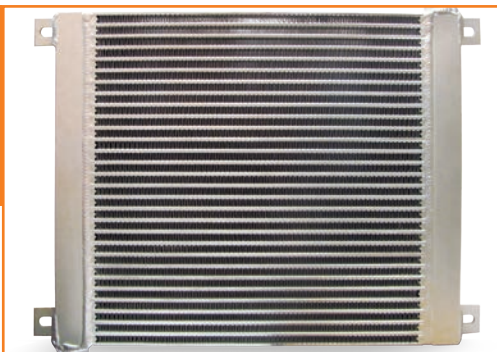

NEXT SIZE UP: A100D240-3230

(2)10 HP | 872 RPM
2 STAGE | 240 GALLON TANK
76.4 CFM | SIMPLE CONTROL PANEL

6-11 PERSON BODY SHOP
10-15 PERSON AUTO REPAIR SHOP
MANUFACTURING PLANT

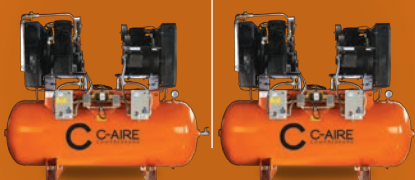

NEXT SIZE DOWN: A050D120-3230

(2)5 HP | 970 RPM
2 STAGE | 120 GALLON TANK
35.4 CFM | SIMPLE CONTROL PANEL

3-5 PERSON BODY SHOP
4-7 PERSON AUTO REPAIR SHOP
TRUCK REPAIR OR TIRE SHOP
SMALL MANUFACTURING PLANT